

HOW TO USE YOUR FLEET EFFECTIVELY



MANY CARRIER VEHICLES - ONE SOLUTION

Do you want perfectly manicured green spaces without having to purchase another vehicle for maintenance?

Müthing's patented loader mounts give you maximum efficiency for your fleet with a perfect mulching result.

The hydraulically driven mulchers can be flexibly mounted as required on various yard or wheel loaders in just a few steps.

This transforms your vehicle into a ground care specialist in no time at all.

It will save you an enormous amount of time. And you do not have to incur additional acquisition costs for a suitable vehicle for the maintenance of verges, green spaces etc.

You simply use your existing yard or wheel loader and thus save time and money.

Advantages:


- Efficient utilisation of existing vehicles
- Cost savings as there is no need to additionally purchase a separate vehicle
- Time-saving assembly of the mulcher due to good accessibility of hydraulic connections
- Perfectly maintained surfaces thanks to the MU-Vario System®
- Working widths from 1.20 - 2.00 m

MÜTHING MULCHERS




STAY ONE STEP AHEAD WITH CERTIFIED SAFETY!

- Europe's agricultural machinery manufacturers have to produce their machines in accordance with CE machinery directives.
- Applying the CE marking is a self-declaration of compliance with the CE machinery directives.
- One of these CE machinery directives is entitled: "Thrown-object test and acceptance criteria for flail mulchers as per ISO/WD 17101-2"
- We went one step further and commissioned an independent, accredited institute to assess and certify our compliance with this machinery directive.

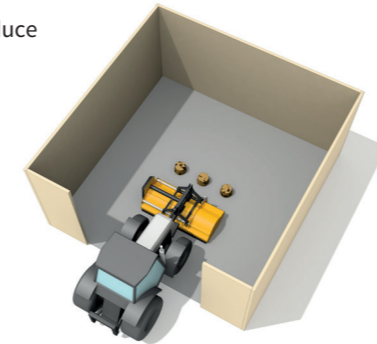

Maximum safety and worry-free operation

with observation of the safety clearances of 8 metres towards the front and rear and 2 metres towards the right and left.

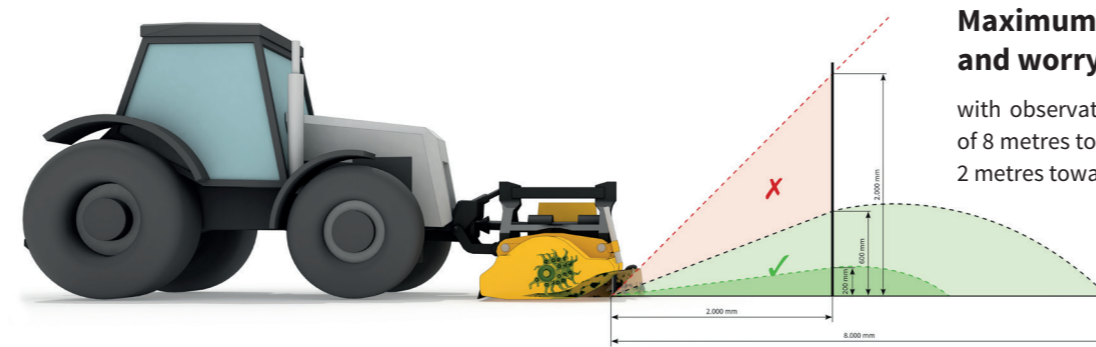

Your contact:



Müthing GmbH & Co. KG Soest
 Am Silberberg 23
 D-59494 Soest
 Tel. +49 (0) 2921 96510
 Fax +49 (0) 2921 73080
 soest@muething.com
 www.muething.com

We provide no guarantees relating to illustrations, content or technical specifications. Subject to change without prior notice. Reprinting prohibited, including of extracts. Copyright: Müthing GmbH & Co. KG Soest, Am Silberberg 23, D-59494 Soest, Issue date: 02/2021, Yard loader brochure



SUITABLE FOR ALL CARRIER VEHICLES



USE YOUR FLEET EFFECTIVELY

WITH THE OPTIMAL LOADER MOUNT FOR MULCHERS


THE MU-CONNECT 200 SYSTEM

LOADER MOUNT FOR MULCHERS

A clever interface

- The innovative loader mount is available for MÜthing mulchers of the MU-E Hydro Vario series in working widths of 1.40 to 2.0 m and for installation on small to medium-sized yard loaders up to 90 l/min. A wide range of adapters allows installation on numerous vehicle models.
- The virtual pulling point is patented by MÜthing. Instead of being pushed, the mulcher is pulled with low rolling resistance and thus follows every ground contour perfectly
 - No grinding of the support roller due to low weight loading and tracking when cornering
 - Generous swinging and steering movements ensure optimal ground adaptation

PERFECT GROUND ADAPTATION FOR OPTIMAL RESULTS

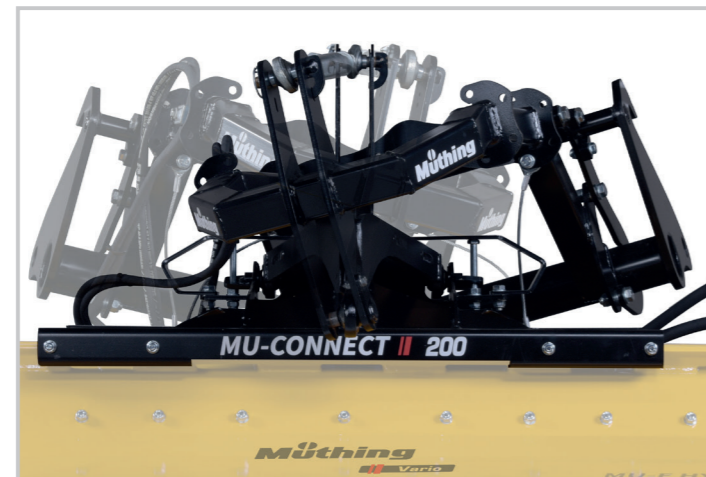

On uneven surfaces, generous swinging and steering movements ensure optimal ground following.

Suitable MU-CONNECT adapter plates for many carrier vehicles

Adapter options for the MU-Connect 200 are available for the following holders:

- Schäffer
- Kramer
- Liebherr, Claas Torion
- Weidemann
- Multione, Avant
- Ladog
- Multicar
- Euro -3
- Holder
- Hansa
- Universal adapter plate



Hook holder for various manufacturers (example shown)



Fork shoes for pallet forks



A unique feature is the patented virtual pulling point. Instead of being pushed, the mulcher is pulled with low rolling resistance and thus follows every ground contour perfectly.



The mulcher follows the steering radius of the vehicle when cornering and the support roller does not scrape due to its low weight loading, thus protecting the ground.

MU-E HYDRO VARIO

THE PERFECT PARTNER - MU-CONNECT IN COMBINATION WITH THE MU-E FRONT MULCHER

Our expertise is your advantage:

- Working widths from 140 to 200 cm
- For machine operation from 50 - 90 l / min
- Adjustable MÜthing Vario cutting bar
- Also suitable for short cutting with low crop height
- Infinitely variable height adjustment of the working width
- MU-Connect - Attachment via 3-point linkage with two-dimensional swing compensation
- Mounting parts available for almost all carrier vehicles
- Technical Inspection Association stone projection test





You can see the MU-Connect in action here. Just scan the QR code:



MU-CONNECT 200 + MU-E HYDRO VARIO



Custom-fit, vehicle-specific mounting parts make it possible to perform coupling quickly, without the use of tools and free of play in just a few seconds.

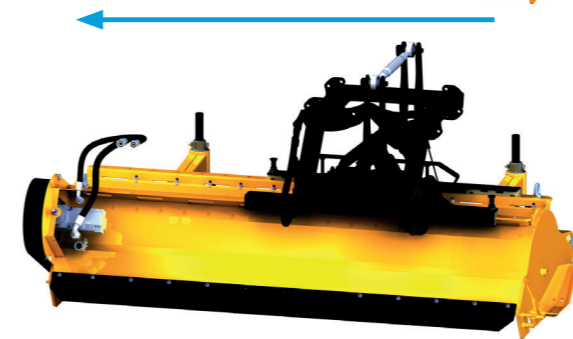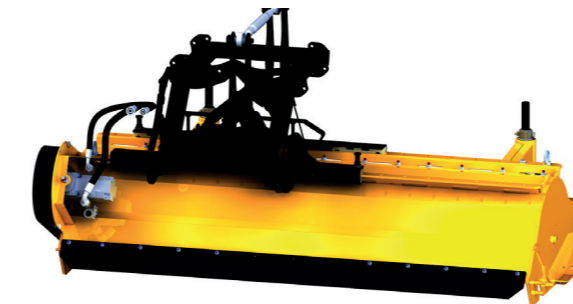

Hydraulic side shift with 26 cm adjustment travel creates flexibility for mulching at an offset to the side of the vehicle around trees, access zones or other obstacles (optional). Mechanical side shift is equipped as standard.



A low coupling point ensures good overall visibility due to the low linkage position.

MU-FM HYDRO

FRONT MULCHER WITH HYDRAULIC DRIVE FOR YARD LOADER

More use and efficiency from your yard loader

- Professional mulcher for a very wide variety of carrier vehicles
- Optimal mounting with specific support arms or coupling triangle
- Sturdy design for maximum throughput and a long service life
- Suitable for hydraulic outputs from 35 to 70 l/min
- Working widths from 120 to 160 cm
- For machine operation at 40-50 l / min
- For implement carriers without cardan shaft output
- Powerful hydraulic motor
- Large selection of linkage adapter plates for simplified mounting
- Optionally available hydraulic control blocks enable connection to the vehicle hydraulics for oil quantities above 48 l/min
- A hydraulic side shift of 700 mm to the right is optionally available
- Technical Inspection Association stone projection test



Available for the following carrier vehicles

- Avant yard loader
- Yard loader with Euro-3 holder
- Schäffer yard loader with old holder
- Schäffer yard loader with SWH holder
- Weidemann yard loader with hydraulic locking

An adapter plate for yard loaders without vehicle-specific attaching parts is also available.

You can see the MU-FM Hydro in action here.

Just scan the QR code:



Subscribe to our channel at www.youtube.com/c/MÜTHINGGmbHCoKGSoest



Vertically adjustable 360° swivelling support wheels ensure optimal ground adaptation, optionally also available with 4 support wheels instead of support roller.